

AQUATOP 1 YEAR LIMITED WARRANTY

Products are guaranteed by AQUATOP® Aquatic Supplies to the original purchase against defective material and workmanship under normal use for a period of 1 year from the date of the original purchase through an Authorized Aquatop Reseller.

Products have no warranty if:

- 1.) The product has been serviced, modified or tampered with by anyone other than AQUATOP Aquatic Supplies,
- 2.) The product has been abused or damaged (including broken or cracked bulbs), and/ or
- 3.) The product has been transported without proper packaging,
- 4.) The product was purchased from an Unauthorized Reseller.

Note: All sales from Amazon and Ebay (regardless of seller) do not qualify for any warranty coverage. Please see www.aquatop.com for more information.

AQUATOP EXCLUSIVE 1 + 1 EXTENDED WARRANTY

The additional 1 Year Extended Warranty applies when you REGISTER online with Aquatop. Register your Extended Warranty at www.aquatop.com.

Note: Extended warranty is available for qualifying products. See www.aquatop.com for a list of qualifying products.

- 1.0. Terms and Conditions of Guarantee.
- 1.1. Aquatop warrants to the purchaser, for 1 Year from date of original purchase through an Authorized Aquatop Reseller, to repair or replace goods where fault is found due to defective materials or faulty workmanship and where goods do not operate in accordance with the instructions.
- 1.2. All claims for repair or replacement must be made at place of purchase.
- 1.3. The original and dated Proof of Purchase (receipt) must be supplied with all goods claims. Please also provide this Guarantee where possible.
- 1.4. All goods subject to claim under Guarantee should be prepared for transportation in the original packaging or other comparable packaging which offers the same degree of protection.
- 1.5. Where goods are repaired or replaced under Guarantee, these goods are Guaranteed for the remainder of either the original Guarantee or Extended Guarantee period.
- 1.6. Where claims on inspection reveal goods are in normal working order, Aquatop will request reimbursement of all reasonable costs incurred.

WARRANTY LIABILITY DISCLAIMER

In no event will Aquatop® be liable for any consequential or incidental damages, including but not limited to, lost sea life, personal injury, property damage, equipment damage, lost profits, lost wages, lost savings, lost income, etc., arising out of the use of any Aquatop products.

For more information on tank health and maintenance as well as other products carried by Aquatop,

visit our website: www.aquatop.com

775 Columbia St. Brea, CA 92821
Tel: (888) 915-2782 (562) 697-9860

www.aquatop.com
V1 /2020



MAXFLOW®

DC WATER PUMP



MaxFlow DC Water Pump Manual V2/2020

OWNER'S MANUAL

INTRODUCTION

The AQUATOP MAXFLOW Series of fully submersible pumps are powerful, yet quiet, and designed for very low energy consumption. Capable of moving 515 to 2,377 gallons per hour, the MAXFLOW Series is suitable for both fresh and saltwater aquarium use and is an excellent choice for aquariums or sumps. These versatile pumps come equipped with an External Controller for precise flow control and come equipped with numerous multi-purpose fittings for in-line or fully submersible applications, and are easily installed as a main system pump in wet and dry filters or sump boxes.

FEATURES:

- Highly Efficient Design
- Ultra Quiet
- External Controller for Adjustable Flow Control
- 10 min Feeding Suspension
- In-line or Fully Submersed
- UL Power Supply & Cord
- For Fresh & Saltwater

READ ALL SAFETY INSTRUCTIONS BEFORE USE

WARNING

To guard against injury, basic safety precautions should be observed, including the following:


DANGER

To avoid possible electric shock, special care should be taken since water is employed around the use of this product. For each of the following situations, do not attempt to repair yourself: return the appliance to an authorized service facility for service or discard the appliance.

NOTE: It is your sole responsibility to verify that the plug and the receptacle are clean and free of moisture and salt buildup at all times. The receptacle must be free of water, salt, calcium, magnesium and dust. Failure to do so can cause fire, damage to property, and permanent damage to the product and personal injury not limited to loss of life.

NOTE: Before installing the unit, check for any signs of damage to the device. If there are any signs of damage to the device, power cable or plug, do not use and return to place of original purchase.


1. Read and follow all instructions.
2. A drip loop must be used with all electrical aquarium devices. A drip loop is a self-made part of the cord hanging below the receptacle. (See fig. 1)
3. A GFCI (Ground Fault Circuit Interrupter) should be used in the branch circuit supplying all power to water pumps and electrical aquarium equipment. If you do not have a GFCI, we strongly recommend having a qualified electrician install one prior to operating any aquarium component.
4. Do not plug into extension cord/power strip.
5. Use this product for its intended purpose only.
6. Never yank or pull the cord from the electrical outlet.
7. Do not operate if the plug or wire is damaged.
8. Verify that hands are dry prior to disconnecting the power.
9. To reduce the risks of electrocution, keep all connections dry.



SAFETY INSTRUCTIONS (CONT'D)

10. For indoor use only.
11. If any of the electrical components get wet, unplug immediately.
12. Do not use soaps or detergents when cleaning the exterior surface of this device.
13. Make sure the device is completely dry before connecting.
14. Keep this product away from children

SETUP / PARTS LIST

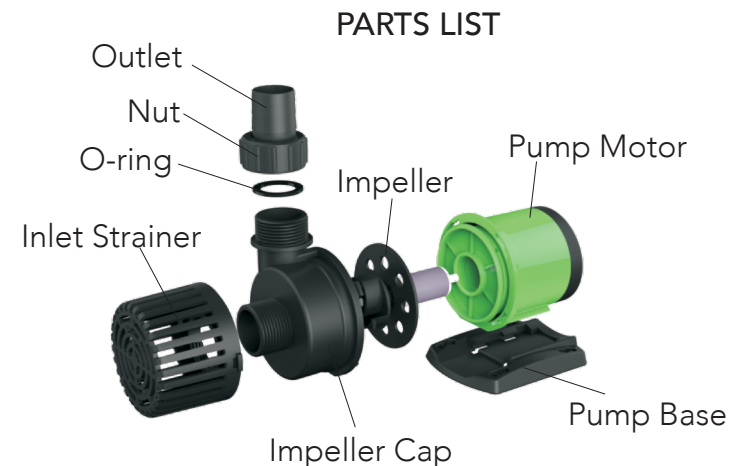

SPECIFICATIONS

MODEL	FLOW	MAX HEAD HEIGHT	OUTPUT	VOLT/FREQ	AMP
MWP-500	515GPH	8'	DC24V	100V/60Hz	1.0A
MWP-1000	1110GPH	10.5'	DC24V	100V/60Hz	1.5A
MWP-1500	1479GPH	15'	DC24V	100V-60Hz	2.5A
MWP-2300	2377GPH	26'	DC24V	100V-60Hz	5A